WINNERS

SG55U

Electric release
Base free lift
(5.5 ton)

Suitable for long wheel base vehicles

012 664 3556 071 464 0250 sales@integratedmarketing.co.za

Model: SG55U

Product: 5.5 Ton electric release - Clear floor

Description: Clear Floor lift version has no obstruction between the 2 posts. They are considered ideal for when transmission jacks are constantly in use or cars with a low ride height. The steel ropes and hydraulic pipes go over the top. 3 stage telescopic lifting arms enabling you to lift anything from a small car, a transporter or a camper with a long wheelbase.

Features:	**Benefits:**
Electric release	Less physical labor
Clear floor design	The hydraulic hose and equalization cables run across the top of the lift through a metal bar (conduit) that connects both columns in the Overhead lift. The metal bar (conduit) is there to guide the hose and cables and is not designed to support any vertical weight. There is a cut-off cable (connected to the power unit) located just below the metal overhead conduit which "kills" power to the motor preventing damage to the top of the car, if the lift operator was not paying attention.
3 Stage arms	Enabling you to lift anything from a small car, a transporter or a camper with a long wheelbase.
Solenoid lock release	Locks can be released by a push of a button
Driving through width up to 3 meters	Ideal for wider vehicles
Double cylinders	This creates a higher force level that is more reliable and easier to control
Dynamic test 115% of the rate capacity	Ensures the hoist works correctly through its full cycle of operation
Static test: 150% of the rated capacity	Static load testing, to unsure the lifts can handle the recommended tonnage. Safety test.
Preset related loading	Designed to avoid overload running
ABS control box, 24v low voltage control system	Conforms to ISO standards and electrical components of the lift.
High quality seals from Italy	Seals can withstand high pressure and mechanical stress.
Quality power rack	Ensures safety at all heights.
Conforms to CE requirements	The CE Mark on a product or machine identifies it as complying with all the of safety requirements established by the European Union.
	High Lifting Capacity: The 5.5-ton lifting capacity of this equipment allows the fitment center to service a broader range of vehicles, including pickup trucks and commercial vehicles with longer wheel bases. This versatility can attract a wider customer base and increase revenue potential.

	Enhanced Vehicle Access: The 3-stage arms provide even greater flexibility and accessibility when positioning vehicles on the lift. This is especially valuable for servicing vehicles with varying wheelbases and configurations, ensuring efficient and accurate lifting.
	Time Efficiency: The efficiency of a base-free 2-post lift with 3-stage arms can significantly reduce the time required to position and lift vehicles. This results in quicker service turnaround times and increased overall productivity for the fitment center.
	Improved Safety Features: Advanced 2-post lifts often come with a range of safety features, such as automatic safety locks, hydraulic synchronization, and overload protection. These features enhance technician safety and reduce the risk of accidents during vehicle servicing.
	Space Efficiency: Base-free lifts have a compact design, which is beneficial for fitment centers with limited available space. They provide a high lifting capacity without the need for a baseplate, allowing for efficient use of workspace.
	Versatility: The combination of high lifting capacity and 3-stage arms makes this type of lift highly versatile. It can accommodate a variety of vehicle types, from passenger cars to commercial vehicles, offering a broader range of services.
	Technician Comfort: The ergonomic design of the lift, along with the 3-stage arms, reduces physical strain on technicians. This leads to improved job satisfaction and productivity among staff.
	Cost Savings: While the initial investment in such equipment can be significant, the time efficiency and versatility it offers can lead to cost savings over time. Faster service times and reduced labor requirements contribute to lower operating costs.
	Customer Satisfaction: Efficient and high-quality service, facilitated by advanced equipment, often leads to higher customer satisfaction. Satisfied customers are more likely to return for future service needs and recommend the fitment center to others.
	Competitive Advantage: Outfitting the fitment center with advanced equipment like a base-free 5.5-ton 2-post lift with 3-stage arms can set it apart from competitors. This can attract more customers and enhance the center's reputation in the market.

	Long-Term Investment: High-quality base-free lifts with 3-stage arms are built for durability and longevity. This long-term investment can offer a high return on investment over the equipment's lifespan.
Training available	Technicians can be professionally trained to use the machine and get the maximum benefit from it.
1 year warranty	The machine will be repaired if there are any factory faults and can be replaced if required.
Spares available	Should you have a breakdown you will not have to wait for your machine to be repaired. If there is anything we don't have, we fly it in directly from the Suppliers.

Important notice!

- Lift must be installed indoors.
- Approved installers must be used when installing lifts or warranty will be void.
- All electrical connections must be done by a qualified Electrician, and each unit requires a separate isolator.

Technical information	
Lifting capacity	5500 kg
Max lifting height	1900mm
Min lifting height	85mm
Power of motor	3.0Kw
Oil pressure	18Mpa
Power supply	220V
Rise time	50s
Lowering time	40s
Packaging dimensions 1/3	2950*570*930 mm
Packaging weight 1/3	1059 kg
Packaging dimensions 2/3	970*290*350 mm
Packaging weight 2/3	25 kg
Packaging dimensions 3/3	550*300*180 mm
Packaging weight 3/3	7.5 kg

Warranty terms

grounding installing

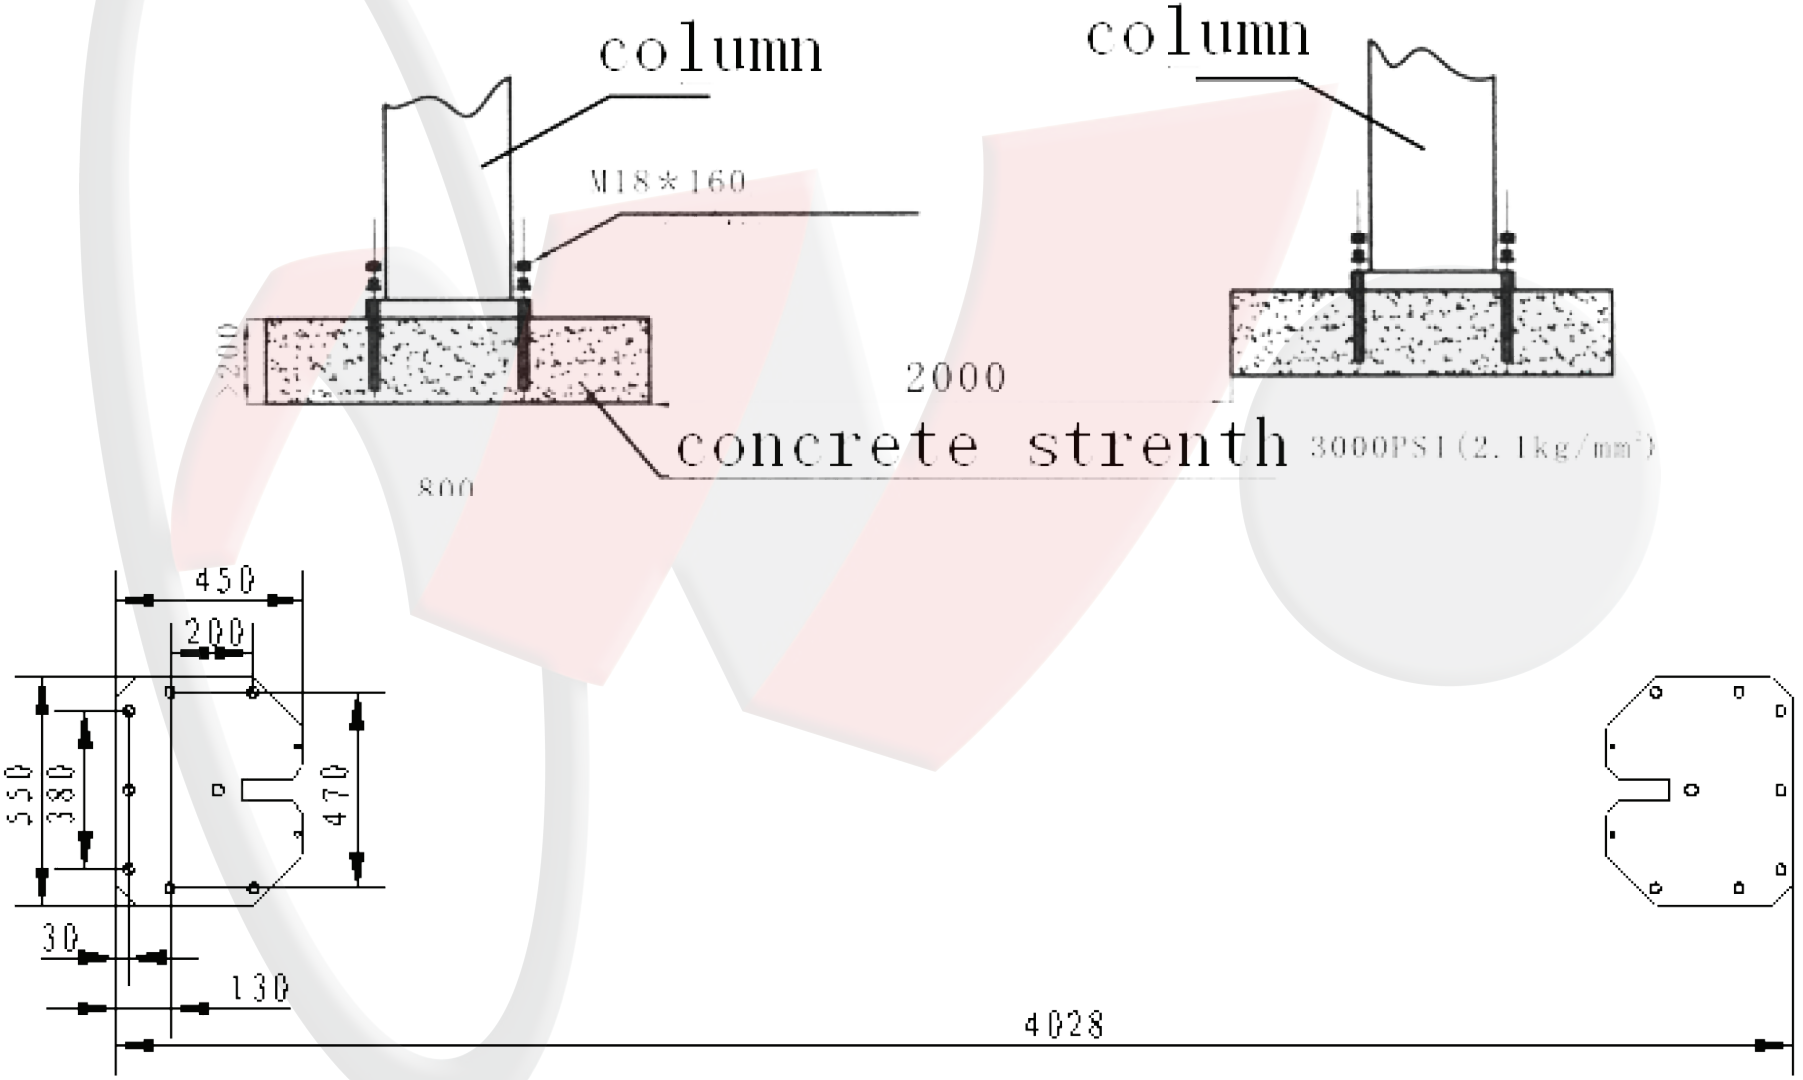

www.integratedmarketing.co.za

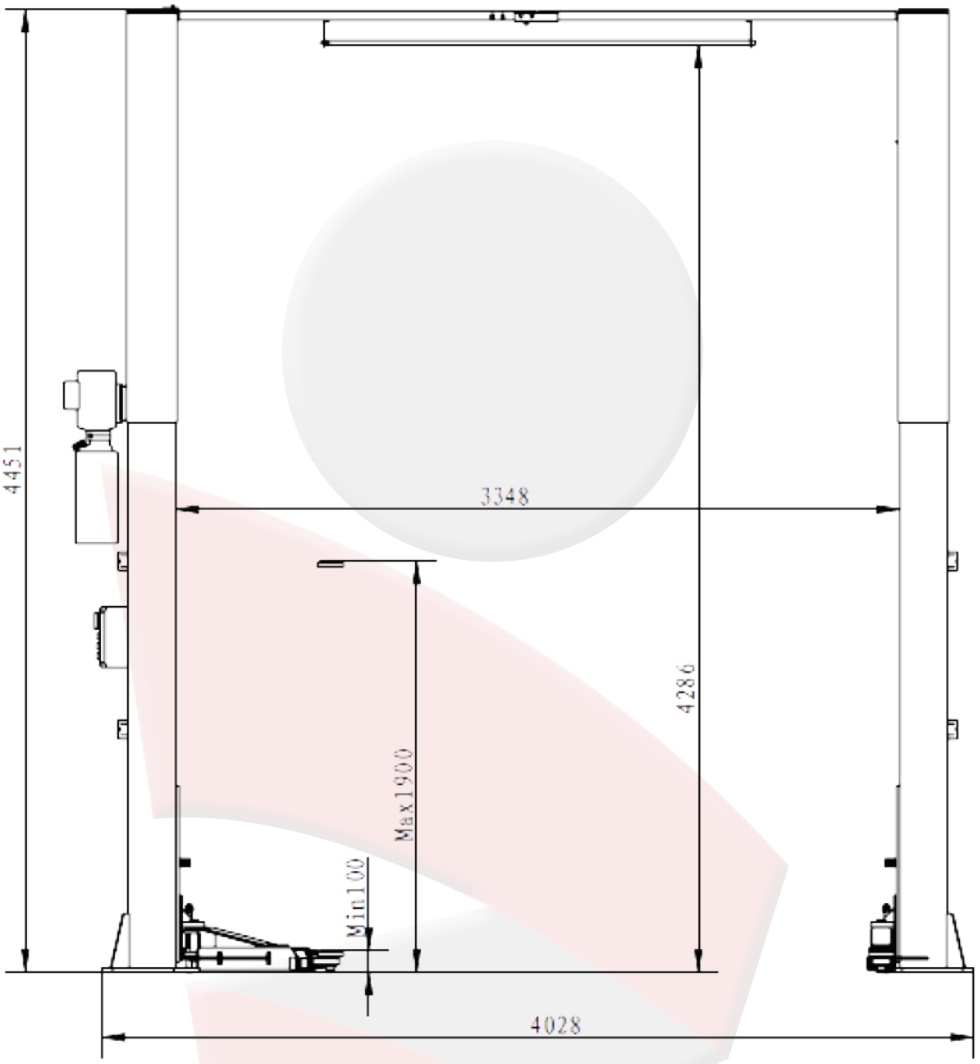

ARMS OPTION A

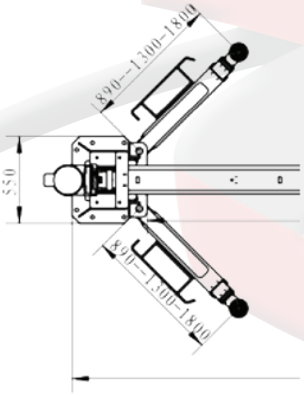
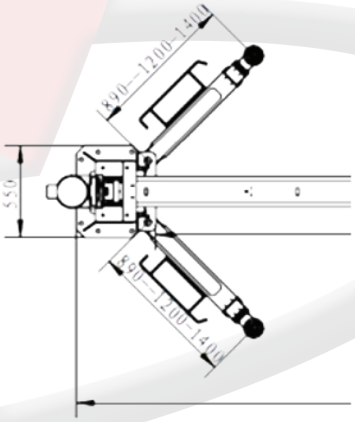
ARMS OPTION B